


Features and Components

Nail-Lok WD is utilized with wood decks in several panel applications including Nailboard, Vented Nailboard, structural insulated panels (SIP), and prefabricated wall panels. The extra-large star/spider head increases pull-through resistance and eliminates the need for plates or washers.

- Use:** Nailboard and Vented Nailboard Fastener.
- Material:** 10B21 steel with a corrosion-resistant coating.
- Shank:** 0.190" diameter
- Head:** 0.625" diameter star/spider drive
(Free drive bits in each bucket).
- Point:** Gimlet
- Color:** Black
- Deck Type:** Wood

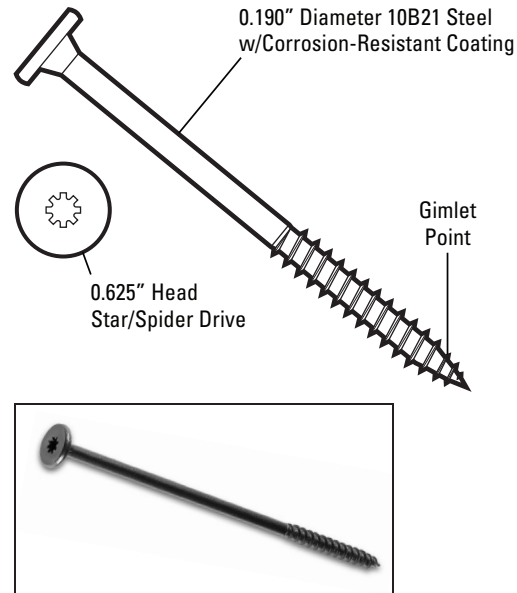

Component
F Fastening
Type
I Insulation

System Compatibility

Nail-Lok WD is used as a component in specialized systems involving Nailboard and Vented Nailboard. Please contact JM for information on system compatibility.

Energy and the Environment

Recycled Content	This steel-based product contains a minimum of 25% post-consumer recycled materials by weight.
------------------	--

Peak Advantage® Guarantee Information

Systems
Fastener used in specialized systems, please contact JM for availability of Peak Advantage Guarantee.

Installation/Application

Install Nail-Lok WD using high-torque, low-RPM, screw gun. Do not over drive; underside of head should be flat to the panel surface.

Fastener Sizes	Quantity per Container
4½" to 10" (11.4 cm to 25.4 cm) in ½" (1.3 cm) increments	250/pail
11" to 16" (27.9 cm to 40.6 cm) in 1" (2.5 cm) increments	
Producing Location	Agawam, MA

Physical Properties

Property	Nail-Lok WD	
Strength	Tensile (lbf) per ASTM E8-13a	4,060
	Shear (lbf) per NASM 1312-20 Rev. 2011	3,019
Pull-Thru	Head thru ⅞" OSB (lbf)*	325 (±55)
	Head thru ¾" Plywood (lbf)*	1,000 (±100)
Withdrawal	½" Plywood	345
	⅝" Plywood	438
	¾" Plywood	727

*Pull-Thru values are for new plywood and OSB. Pull-out values are for Plywood only. Actual values may vary.