



UL Class A Approvals

COMBUSTIBLE WOOD DECK




ProtectoR® HD, SeparatoR® CGF and ENRGY 3® CGF achieve UL Class A approvals over combustible wood decks up to ½":12" slope. These versatile Class A approvals allow for installation of a single layer of each product or in combination with additional layers of ENRGY 3 insulation. These approvals eliminate the need to use FR-faced products up to ½":12" slope.


COMMON UL CLASS A ASSEMBLIES INCLUDE THE FOLLOWING EXAMPLES:



1. JM membrane
(Adhered, fastened or induction-welded)
2. ENRGY 3 CGF (min. 1" thickness)
(Joints offset min. 12" from wood deck joints)
3. Optional layer(s) of ENRGY 3 insulation
(Any thickness)
4. Combustible wood deck

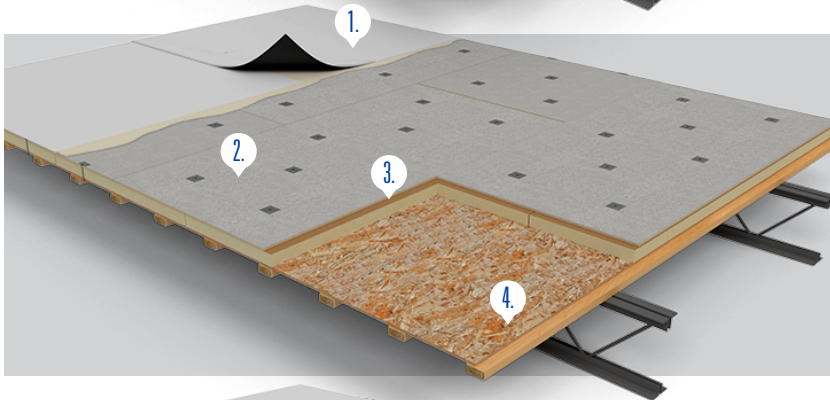

1. JM membrane
(Adhered, fastened or induction-welded)
2. Protector HD or SeparatoR CGF
(Joints offset min. 12" from wood deck joints)
3. Optional layer(s) of ENRGY 3 insulation
(Any thickness)
4. Combustible wood deck

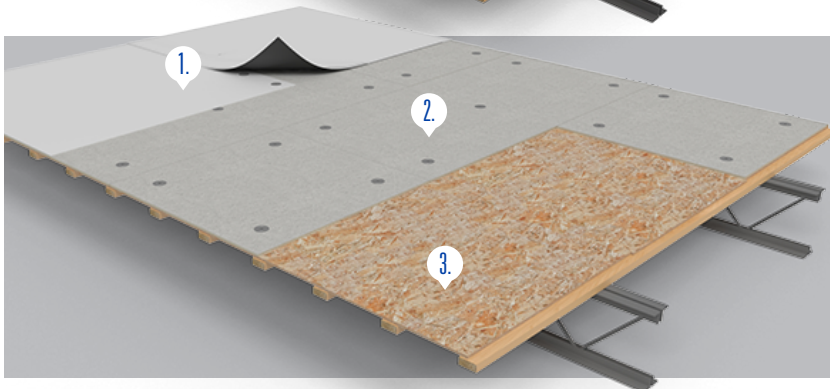

1. JM membrane
(Adhered, fastened or induction-welded)
2. SeparatoR CGF, Protector HD or ENRGY 3 CGF (min. 1" thickness)
(Joints offset min. 12" from wood deck joints)
3. Combustible wood deck

Learn more about JM Protector HD, SeparatoR CGF and ENRGY 3 CGF and our comprehensive portfolio at jm.com/roofing