

Features and Components

JM #15 Dekfast Fastener is a corrosion-resistant e-coat #15 fastener with a #3 Phillips head, and a drill point designed for quick installation in new or re-roof applications.

Use: JM isoweld® system only


Material: Carbon Steel

Gauge: #15

Head: #3 Phillips head

Color: Black

Deck Type: Wood, 18 - 24 gauge (1.25 mm - 0.56 mm) Steel, or structural concrete.

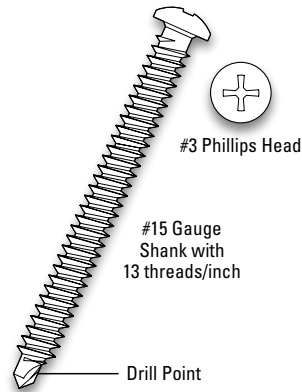

Component



Type



Single Ply



System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	CA	MF
Do not use in Multi-Ply systems									

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
Only for use with JM isoweld system							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

Recycled Content	This steel based product contains a minimum of 25% post consumer recycled materials by weight
------------------	---

Peak Advantage® Guarantee Information

Systems	Approved to use with only with JM isoweld systems
---------	---

Codes and Approvals*



*Fastener approvals are based on system approvals. The only codes available are for JM isoweld systems.

Installation/Application

Refer to the application instructions guidelines for proper utilization of this product.

Packaging and Dimensions

Standard Fastener Sizes	Quantity per Container*
1/4", 2" to 5" (3.2 cm, 5.1 to 12.7 cm)	1,000/carton
6" to 10" (15.2 to 25.4 cm)	500/carton
10" to 28" (25.4 cm to 71.1 cm) - even lengths only	250/carton
22" (55.9 cm) and 24" (61 cm)	125/box
Producing Locations**	See note

* A bit is provided in each pail.

**The point of manufacture for fasteners varies depending on the specific part. Call your local JM sales professional for assistance.