

DuraChop® 230

For Gypsum

Product description:

DuraChop® 230 roving is manufactured with continuous glass fibers of defined diameter into a cylindrical roving package.

It is characterized by a water soluble sizing with good choppability, compatibility with gypsum and by good distribution in the gypsum matrix and excellent dosing properties.

DuraChop® 230 roving is uniquely designed for reinforcement of wallboard.

Resin compatibility:

- Water based systems

Benefits:

- Excellent unwinding
- Very low fuzz and static
- Fast wet through and wet out
- Uniform carpet lay-down
- Very good choppability
- Uniform splitting during chopping



Designation: Glass type is E-Glass

JM Designation	Region	Linear density Tex (g/km)	Sizing content (%)	Moisture content Max.(%)
DuraChop® 230 2400	EU	2400	0.8	0.15

Bobbin dimensions:


Region	JM Designation	Typical weight	Inner diameter	Outer diameter	Height	Bobbin wrap
EU	DuraChop® 230 2400	20 kg	77 mm	280 mm	270 mm	Shrink film

Packaging:

Region	JM Designation	Packaging type	Pallet dimensions (mm)	Net weight per pallet (kg)	Bobbins per pallet
EU	DuraChop® 230 2400	Cardboard box	1200 x 880	1030	48
			1180 x 1180	1300	64

Storage:

These products should be stored in original packaging in dry, roofed, dust free storehouses. The recommended temperature is between 10°C to 30°C (50°F to 86°F) at relative air humidity between 30% to 80%. The products should remain in the original packaging and be conditioned in the work area for a minimum of 24 hours prior to use. The pallets should be single stacked unless otherwise specified on the packaging unit.

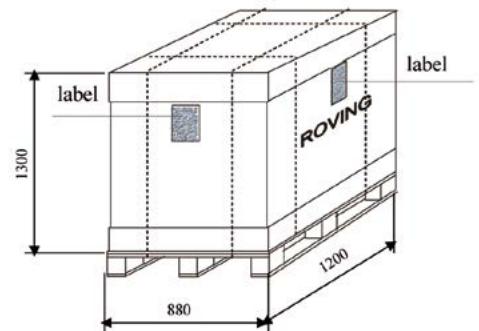

Warranty disclaimer :

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The physical and chemical properties of this product represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the Regional Sales Office nearest you for the most current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on Johns Manville products, please visit www.jm.com/en/login/policies-terms-and-conditions or call (800)654-3103.



US Headquarters

Johns Manville
717 17th Street
Denver, CO 80202 - USA
Phone: +1 (303) 978 2000

Customer-Service-Offices:

North America
Johns Manville
7500 Dutch Road
Waterville, OH 43566 - USA
Phone: +1 (800) 554 4826
Fax: +1 (419) 878 1538

Europe

Johns Manville Slovakia, a.s.
Strojárska 1
91799 Tmava - Slovakia
Phone: +421 (0) 33 5918 249
Contact: fibers@jm.com

www.jm.com