


Meets the requirements of ASTM D 6221, Type I

Features and Components

Reflective Roofing Granules: Specifically engineered for high reflectivity, durability and optimal embedment in the SBS modified bitumen sheet.

High-Quality SBS Rubber and Asphalt Blend: Lends elasticity and flexibility to the sheet. The thicker JM SBS coating provides more waterproofing value.

Fiber Glass/Polyester Reinforcement Mat: Combines the excellent tensile strength, toughness and puncture resistance of a polyester mat with the dimensional stability and lay-flat characteristics of fiber glass.

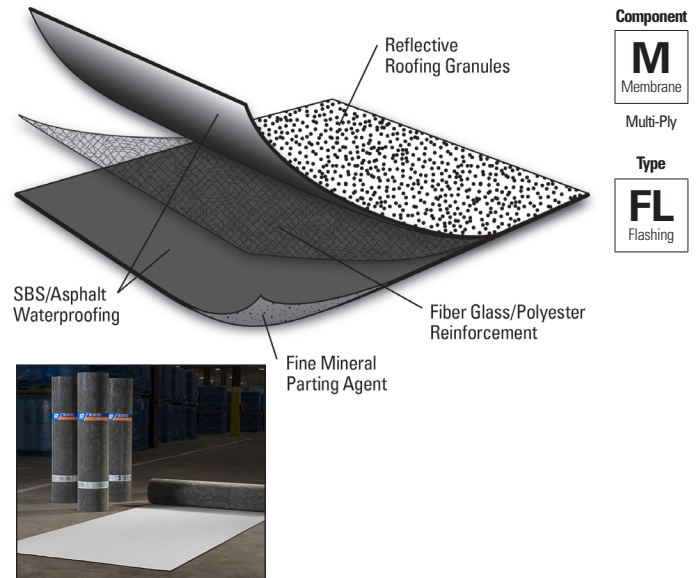

Color: Bright white only

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR			APP			SBS			
	HA	CA	HW	HA	CA	HW	SA	MF		
<i>Compatible with the selected multi-ply systems above</i>										

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
<i>Do not use with single ply systems</i>										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

CRRC*	Test	Initial	3-Year Aged**
		Reflectivity (ASTM C 1549)	0.70
	Emissivity (ASTM C 1371)	0.90	0.91
Rated Product ID: 0662-0042c Licensed Manufacturer ID: 0662 Classification: Production Line			
LEED®	Solar Reflectance Index (SRI) - E 1980	85	80
	Recycled Content	0%	

* Cool Roof Rating Council ratings are determined for a fixed set of conditions, and may not be appropriate for determining seasonal energy performance. The actual effect of solar reflectance and thermal emittance on building construction may vary.

Manufacturer of product stipulates that these ratings were determined in accordance with the applicable Cool Roof Rating normal procedures.

** Tested in accordance with Rapid Ratings D7897.

CAN BE USED TO COMPLY WITH TITLE 24 PART 6 COOL ROOF REQUIREMENTS

Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in most 2-5 ply JM SBS systems.*	Up to 30 years

*Contact JM Technical Services for specific system requirements for guarantee lengths.

Installation/Application



- May be installed in Type IV asphalt or in an approved JM adhesive
- Laps may be installed using heat-welding techniques
- Refer to JM SBS modified bitumen specifications and detail drawings for application and slope information

Packaging and Dimensions

Roll Coverage*	75 ft ² (6.97 m ²)
Roll Length	25' (7.62 m)
Roll Width	36" (0.91 m)
Roll Weight	69 lb (31.3 kg)
Rolls per Pallet	20
Pallet Weight	1,435 lb (650.9 kg)
Pallets per Truck**	20
Producing Locations	Macon, GA

*Assumes a 4" side lap **Assumes 48' flatbed truck.

Storage

Shelf Life*	3 months
Storage Conditions*	Max temperature 120°F (48.8°C) and out of direct sunlight

*Extended storage of CR G membranes at elevated temperatures can lead to staining prior to installation

Meets the requirements of ASTM D 6221, Type I

Tested Physical Properties

Physical Properties		ASTM Test Method	Standard for ASTM D 6221, Type I (Min.)	DynaFlex CR G	
				MD*	XMD**
Strength	Peak Tear Resistance	D 5601	1.8 lbf (8 N)	30 lbf (133 N)	46 lbf (205 N)
	Peak Load at 73.4°F (23°C)	D 2523	55 lbf (24.9 kgf)	127 lbf (58 kgf)	132 lbf (60 kgf)
Longevity	Low Temp. Flexibility	D 5683	No Cracks @ 40°F (4.4°C)	No Cracks	
	Thickness	D 751	130 mil. (3.3 mm)	152 mil (3.9 mm)	
Installation	Dimensional Stability	D 5147	N/A	0.2%	0.2%
	Net Mass per Unit Area	D 228	70 lb/100 ft ² (32 kg/9.29 m ²)	70 lb/100 ft ² (32 kg/9.29 m ²)	
	Roll Weight	D 146	N/A	69 lb (31.3 kg)	

*MD = Machine Direction

**XMD = Cross-Machine Direction

Note: Material tested in accordance with ASTM D 5147 Standard Test Methods for Sampling and Testing Modified Bituminous Sheet Materials.

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.