


FEATURES AND BENEFITS

SOLVENT FREE & LOW ODOR	FASTER ADHESIVE APPLICATION	MOISTURE-CURING	COST-EFFECTIVE & HIGH PERFORMING
Alternative to hot asphalt or traditional solvent-based cold adhesives for odor and/or environmentally sensitive applications.	Single-component, gravity-fed ribbon application with an adhesive cart allows for fast installations.	Adhesive cures with ambient moisture for quick green strength. Ribbon application and applicable details allow for venting of ambient moisture below the system.	Application rate of 12" oc ribbons only requires 1 gallon/SQ for -232.5 PSF design pressure.

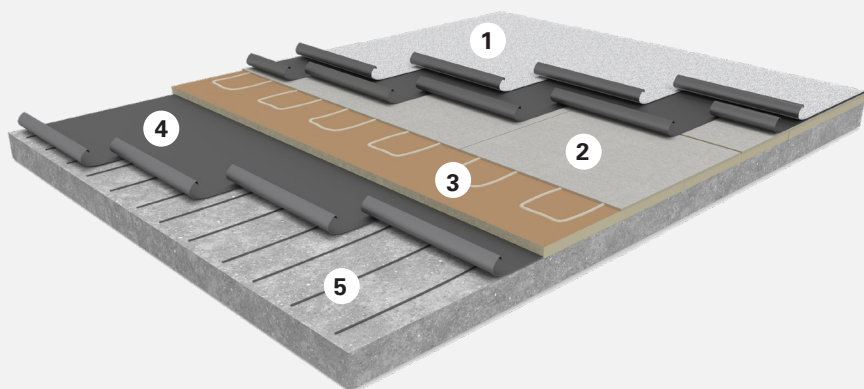

SBS Systems

1. SBS Base and Cap Sheet
2. ProtectoR® HD
3. ENRGY 3®
4. Polyester Reinforced SBS Vapor Retarder

Polyester Reinforced SBS Vapor Retarders

DynaBase® PR
DynaLastic® 180 S
DynaLastic® 250 S

5. DynaSet 1K

Single Ply Systems


1. Adhered TPO or PVC
2. ProtectoR® HD
3. ENRGY 3®
4. Polyester Reinforced SBS Vapor Retarder

Polyester Reinforced SBS Vapor Retarders

DynaBase® PR
DynaLastic® 180 S
DynaLastic® 250 S

5. DynaSet 1K

*May be used to adhere non-SA SBS vapor barrier membranes in single ply systems, but not single ply membranes.

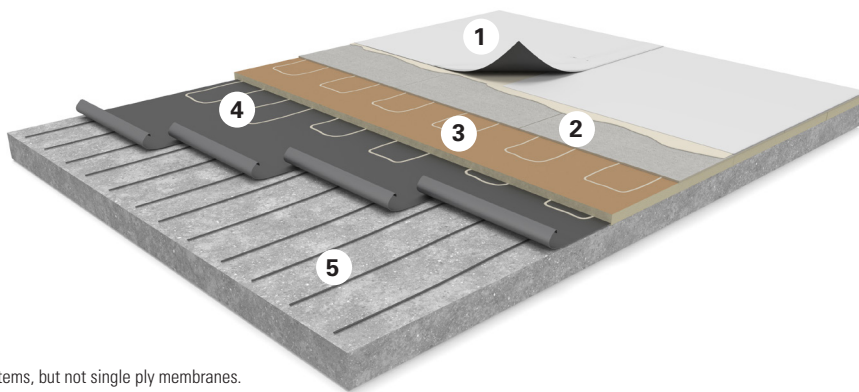

Vapor Barrier Approvals over Structural Concrete Decks with Adhered Insulation in Bituminous and Single Ply Systems

Vapor Barrier		Insulation Adhesive	MDP (PSF)
Membrane	Application		
DynaBase® PR DynaLastic® 180 S DynaLastic® 250 S	DynaSet 1K 12" oc ribbons	JM One-Step Foamable Adhesive, 12" oc JM Roofing System Urethane Adhesive, 12" oc JM Two Part UIA, 12" oc	-232.5
		Hot Asphalt	-337.5

LEARN MORE ABOUT THIS ADHESIVE AT JM.COM/ROOFING