

MultiStar® 266

Product description:

MultiStar® 266 is an assembled roving manufactured with continuous glass fibers of defined diameter into a cylindrical roving package with silane based sizing. It is characterized by excellent choppability, easy wet-out and very good impregnation through optimum fiber distribution.

MultiStar® 266 is used in low-shrink SMC applications based on polyester resin where high quality surface appearance is required with a homogeneous outlook. This requirement is important in sanitary applications, mass transportation (bus and train), building and electrical applications.

SMC composites are durable, recyclable and can save 30% to 50% of CO2 emissions during the life-cycle compared to steel.

Benefits:

- Designed for Multi-Purpose and white SMC
- Improved unwinding and choppability
- Excellent mechanical performance
- Easy wet-out and impregnation
- Very good fiber distribution
- Low static loading
- Reinforcement for SMC in food contact applications under evaluation to comply with Regulation (EC) N° 1935/2004.

Please contact us for further details.

Resin compatibility:

- Unsaturated polyester resin
- Vinylester resin



Designation: Glass type is E-Glass

JM Designation	Region	Roving bundle linear density (tex)	Sizing content (%)	Moisture content max.(%)	Strand linear density Tex (g/km)	Stiffness minimum (mm)
MultiStar® 266 2400 80	EU	2400	1.15	0.15	80	120
MultiStar® 266 4800 80	EU	4800	1.15	0.15	80	120
MultiStar® 266 2400 90	EU	2400	1.15	0.15	90	120
MultiStar® 266 4800 90	EU	4800	1.15	0.15	90	120

Bobbin dimensions:

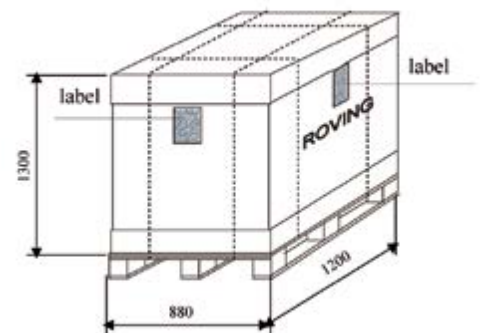
Region	JM Designation	Typical weight (kg)	Inner diameter (mm)	Outer diameter (mm)	Height (mm)	Bobbin wrap
EU	All MultiStar® 266 types	20	77	280	270	Shrink film

Packaging:

Region	JM Designation	Packaging type	Pallet dimensions (mm)	Net weight per pallet (kg)	Bobbins per pallet
EU	All MultiStar® 266 types	Cardboard box	1200 x 880	980	48
			1180 x 1180	1380	64

Storage:

These products should be stored in original packaging in dry, roofed, dust free storehouses. The recommended temperature is between 10°C to 30°C (50°F to 86°F) at relative air humidity between 30% to 80%. The products should remain in the original packaging and be conditioned in the work area for a minimum of 24 hours prior to use. The pallets should be single stacked unless otherwise specified on the packaging unit.

**Warranty disclaimer :**

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The physical and chemical properties of this product represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the Regional Sales Office nearest you for the most current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on Johns Manville products, please visit <https://www.jm.com/en/login/policies-terms-and-conditions/> or call (800)654-3103.

Values:

All data represent typical average values.

**US Headquarters**

Johns Manville
717 17th Street
Denver, CO 80202 - USA
Phone: +1 (303) 978 2000

Customer-Service-Offices:

North America
Johns Manville
7500 Dutch Road
Waterville, OH 43566 - USA
Phone: +1 (800) 554 4826
Fax: +1 (419) 878 1538

Europe

Johns Manville Slovakia, a.s.
Strojárska 1
91799 Trnava - Slovakia
Phone: +421 (0) 33 5918 249
Contact: fibers@jm.com

www.jm.com