

Features and Components

ValuWeld G is used as a cap or flashing sheet in APP multi-ply roofing systems.


Ceramic-Coated Roofing Granules: Specifically engineered for optimal embedment in the APP-blended sheet. The ceramic coating promotes excellent long-term adhesion.

Standard granule colors are available in white and black only.

APP (Atactic Polypropylene) Polymer and Asphalt Blend: Provides an extremely durable sheet with excellent weathering characteristics, flexibility and dimensional stability for ease of handling and quick installations.

Polyester Reinforcement Mat: Offers good tensile strength, toughness and puncture resistance and can accommodate stresses created by typical rooftop expansion and contraction forces.

Polyolefin Burn-Off Film: Promotes ease of heat welding.

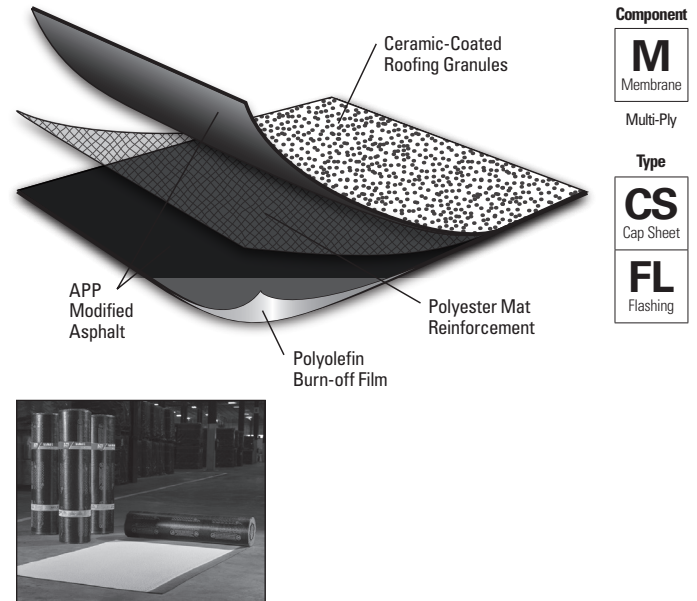

Colors: White and Black only.

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP			SBS			
	HA	CA	CA	HW	HA	CA	HW	SA	MF
Compatible with the selected multi-ply systems above									

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Compatible with the selected single ply systems above										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

Pre-consumer Recycled Content	0%
Post-consumer Recycled Content	0%

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/ roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.

Product Application



Heat Weld

Refer to JM APP modified bitumen specifications and detail drawings for application and slope information.

Packaging and Dimensions

Roll Coverage*	95.8 ft ² (8.90 m ²)
Roll Width	39 3/8" (1 m)
Roll Length	33' (10.06 m)
Roll Weight	107 lb (48.53 kg)
Rolls per Pallet	25
Pallets per Truck**	17

*Assumes a 4" side lap.

** Assumes a 48' flatbed truck.