


## Features and Components

ValuWeld S is used as a cap or base sheet in APP multi-ply roofing systems.

**Premium APP (Atactic Polypropylene) Polymer and Asphalt Blend:** Provides an extremely durable sheet with excellent weathering characteristics, flexibility and dimensional stability for ease of handling and quick installations.

**Polyester Reinforcement Mat:** Offers good tensile strength, toughness and puncture resistance and can accommodate stresses created by typical rooftop expansion and contraction forces.

**Surfacing:** Fine mineral parting agent on the top of the sheet. A polyolefin burn-off film on the bottom side enables the product to be applied using heat-welding techniques.

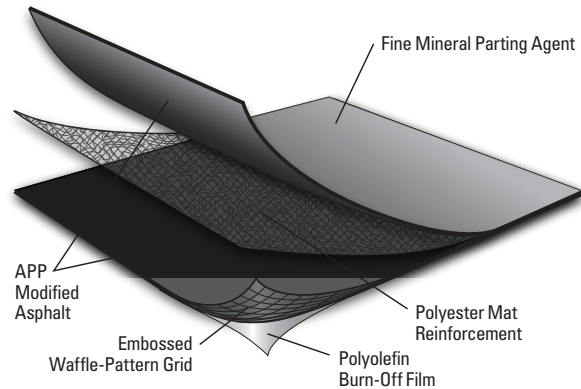

<b>Component</b>
<b>M</b> Membrane
Multi-Ply
<b>Type</b>
<b>CS</b> Cap Sheet
<b>PS</b> Ply Sheet
<b>FL</b> Flashing



## System Compatibility

*This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.*

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
<b>Compatible with the selected Multi-Ply systems above</b>								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<b>Do not use in Single Ply systems</b>							

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

## Energy and the Environment

Pre-consumer Recycled Content	0%
Post-consumer Recycled Content	0%

## Product Application



Heat Weld

- When used as a cap sheet, the use of an approved surfacing is required. Refer to JM APP modified bitumen specifications and detail drawings for application and slope information.

## Packaging and Dimensions

Roll Coverage*	95.8 ft <sup>2</sup> (8.90 m <sup>2</sup> )
Roll Width	39 3/8" (1 m)
Roll Length	33' (10.06 m)
Roll Weight	85 lb (38.56 kg)
Rolls per Pallet	25
Pallets per Truck**	22

\*Assumes a 4" side lap.

\*\*Assumes a 48' flatbed truck.