



JM PVC MEMBRANE

Environmental Product Declaration



JM PVC with DOW Elvaloy® KEE Polymer



Built to withstand the test of time, our PVC roofing membranes are made to resist the toughest weather conditions and chemicals.

JM PVC with Dow Elvaloy® KEE and JM PVC SD Plus thermoplastic roofing membranes are manufactured using an ultraviolet-resistant polyvinyl chloride. Utilizing a polyester fabric reinforcement allows for systems to be both mechanically attached and adhered. PVC membranes deliver a pliable and durable sheet with excellent weathering characteristics and resistance to harsh chemicals and industrial pollutants.

An Industry Leader

Johns Manville, a Berkshire Hathaway company (NYSE: BRK.A, BRK.B), is a leading manufacturer and marketer of premium-quality products for building insulation, mechanical insulation, commercial roofing and roof insulation, as well as reinforcement fiberglass and technical nonwovens. JM serves markets that include aerospace, automotive and transportation, air handling, appliance, HVAC, pipe and equipment, air and liquid filtration, waterproofing, building, flooring, interiors and wind energy. In business since 1858, the Denver-based company has annual sales over \$4 billion and holds leadership positions in all the key markets that it serves. Johns Manville employs 8,000 people and operates 44 manufacturing facilities in North America and Europe.



As a full-line roofing manufacturer of both single-ply and bituminous membrane systems, Johns Manville manufactures the following:

- Thermoplastic Polyolefin membrane (TPO)
- Ethylene Propylene Diene Monomer membrane (EPDM)
- Polyvinyl Chloride membrane (PVC)
- Styrene Butadiene Styrene (SBS)
- Atactic Polypropylene (APP)
- Built Up Roofing (BUR)
- Polyisocyanurate Roof Insulation (ISO)

JM Sustainability Goals

At JM, we are passionate about our ability to succeed in making the company more sustainable. We know that by doing good, we will do well. That is why we've embraced sustainability, working to define what it means to JM and how it benefits our stakeholders. We realize that through these efforts to become more sustainable, we will become more resilient, more innovative, and better positioned to continue serving the changing needs of our customers.



REDUCE our impact on the planet. By 2025, we will:

- Reduce our waste intensity from our 2020 performance by 10%.
- We will use at least 2 billion pounds of external recycle materials in JM products from 2021 through 2025.

EXPAND support of our global workforce.

- Reflect our communities by attracting, promoting and retaining underrepresented groups resulting in an organization that is reflective of the communities where we operate.
- Inspire our employees to volunteer and actively engage in our communities.


INNOVATE a path to a decarbonized future. We will:

- Develop and sell products that increase the net positive benefit to our world by more than 10% by 2025.
- Chart our path to a lower carbon future by:
 - Exploring and implementing alternative renewable energy sources used directly in JM processes
 - Developing a more complete understanding of the impact of our raw material supply chain as the use of fossil fuels phases out
 - Reducing our overall Scope 1&2 GHG emissions by 40% by 2030.

JM Sustainability Highlights *Through 2023*

Guided by our values and commitment to Building a Better Tomorrow, we have generated sustainable outcomes that benefit our planet, communities and customers.

CO₂ REDUCTION



-10%

JM recorded a 10% reduction from our baseline 2017 year as we work towards our 2030 goal of a 40% reduction in Scope 1 & 2 GHG emissions.

REDUCTION IN DAYS AWAY FROM WORK



-47%

due to workplace injuries & illnesses from 2020-2023

REDUCTION IN TOTAL CASE INCIDENT RATE



-4% +

vs. 2020 base year
JM continues working toward our goal of zero serious injuries.

WASTE INTENSITY REDUCTION

2023 reduction, exceeding our goal of 10% reduction by 2025.

-12% +

JM Engineered Products (EP) has **12 straight quarters** of reducing waste intensity in progress to our target goal.



BELOW THE INDUSTRY AVERAGE TOTAL CASE INCIDENT RATE

-61%

2023 rate vs. latest available industry average rate (2022).

EXTERNAL RECYCLED MATERIAL

2 Billion+ lbs

JM is outpacing our 2025 goal of using 2 billion pounds of external recycled material use in products by **1.6% through 2023** – despite a tightening supply of recycled materials.

DONATIONS BY JM EMPLOYEES

\$357,000+

Donations for charitable and community impact efforts, including matching donation in 2023.



VOLUNTEER HOURS

completed by JM employees in 2023



4,000+

PRODUCTS CONTRIBUTING TO LEED CREDITS



72


CERTIFICATIONS



ENVIRONMENTAL PRODUCT DECLARATION

PVC SINGLE PLY ROOFING MEMBRANE

JM PVC WITH DOW ELVALOY® KEE POLYMER

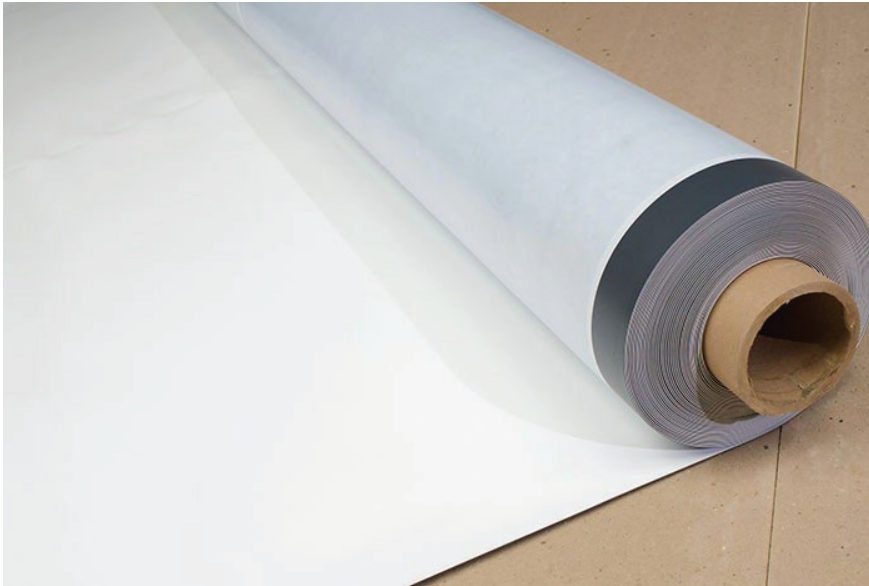

Think JM.

JM PVC with the optimal amount of Elvaloy® KEE is a heat weldable polyvinyl chloride thermoplastic membrane that provides superior resistance against oil, fuels, and other hard chemicals.*



Johns Manville (JM) is a global manufacturer of premium-quality building products for insulation, roofing, fibers and nonwovens for commercial, industrial, and residential applications.

We ensure that each of our products not only performs, but also contributes to the health, safety, and sustainability of the environments where they are used.

We strive to ensure that our products meet the rigorous demands of their applications while focusing on finding new ways to reduce our environmental footprint, and we want to provide you with reliable materials that will allow you to do the same.

The use of JM's products improves energy efficiency in homes and buildings as the quickest and most cost-effective way to reduce energy use and lower greenhouse gas emissions.

People • Passion • Perform • Protect





ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO21930:2017

EPD PROGRAM AND PROGRAM OPERATOR NAME, ADDRESS, LOGO, AND WEBSITE	UL Solutions 333 Pfingsten Rd, Northbrook IL, 60062 www.ul.com www.spot.ul.com
GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER	Program Operator Rules v 2.7 2022
MANUFACTURER NAME AND ADDRESS	Cooley/Group 350 Esten Avenue Pawtucket, RI 02860
DECLARATION NUMBER	4791527289.101.1
DECLARED PRODUCT & FUNCTIONAL UNIT OR DECLARED UNIT	1 m ² of PVC/KEE single ply roofing membrane
REFERENCE PCR AND VERSION NUMBER	Product Category Rule for Preparing an Environmental Product Declaration for Single Ply Roofing Membranes; NSF International, 12-month Extension, December 2024.
DESCRIPTION OF PRODUCT APPLICATION/USE	PVC roofing membrane installed and representative of 50, 60, and 80 mil thicknesses are used as a roofing protective layer for building applications.
PRODUCT RSL DESCRIPTION (IF APPL.)	N/A
MARKETS OF APPLICABILITY	North America
DATE OF ISSUE	February 6, 2025
PERIOD OF VALIDITY	5 Years
EPD TYPE	Product-specific
RANGE OF DATASET VARIABILITY	N/A
EPD SCOPE	Cradle-to-gate with options (A1-A3, A4-A5 and C1-C4)
YEAR(S) OF REPORTED PRIMARY DATA	Calendar year 2022
LCA SOFTWARE & VERSION NUMBER	Sphera LCA For Experts v10.9
LCI DATABASE(S) & VERSION NUMBER	Sphera MLC v. 2024.2 database
LCIA METHODOLOGY & VERSION NUMBER	IPCC AR6, TRACI 2.1 and CML v4.2

The PCR review was conducted by:	NSF International
	PCR Review Panel
	ncss@nsf.org
This declaration was independently verified in accordance with ISO 14025: 2006. <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL	Cooper McCollum, UL Solutions 
	Sphera
This life cycle assessment was conducted in accordance with ISO 14044 and the reference PCR by:	Thomas P. Gloria, Industrial Ecology Consultants 
This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:	

LIMITATIONS

Exclusions: EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc.

Accuracy of Results: EPDs regularly rely on estimations of impacts; the level of accuracy in estimation of effect differs for any particular product line and reported impact.

Comparability: EPDs from different programs may not be comparable. Full conformance with a PCR allows EPD comparability only when all stages of a life cycle have been considered. However, variations and deviations are possible". Example of variations: Different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.

Product Definition and Information

Description of Company

For more than 160 years, Johns Manville (JM) has been dedicated to providing products that create stronger buildings, improve energy efficiency, and contribute to the health and comfort of building occupants.

JM manufactures premium-quality building and mechanical insulation, commercial roofing, glass fibers and nonwoven materials for commercial, industrial, and residential applications. JM products are used in a wide variety of industries including building products, aerospace, automotive and transportation, filtration, commercial interiors, waterproofing and wind energy.

JM employs 8,000 people globally and provides products to more than 85 countries. JM operates 44 manufacturing facilities in North America, Europe, and China. Since 1988, JM's global headquarters has been located in downtown Denver, Colorado.

Product Description

Product Identification

This EPD covers JM's polyvinylchloride (PVC) roofing membranes with Elvaloy® KEE (ketone ethylene ester) polymer available in thicknesses of 50 mil, 60 mil and 80 mil. JM PVC/KEE roofing membranes are manufactured using an ultraviolet-resistant, polyester-reinforced PVC and KEE resins that provide superior resistance against oil, fuels, and other hard chemicals. The polyester-reinforced fabric allows for the membrane systems to be both mechanically attached and adhered. JM PVC/KEE membranes deliver a pliable and durable sheet with excellent weathering characteristics and resistance to harsh chemicals and industrial pollutants. The JM PVC/KEE membranes are typically utilized in mechanically attached commercial roofing systems and provide excellent long term weatherability, hail resistance and repairability. JM PVC/KEE membrane provides a cost-effective, yet highly reliable solution for commercial roofing projects. This combination allows extreme pliability, flexibility and weldability. The following JM PVC/KEE products are covered by this environmental product declaration:

Product Specification

Table 1 lists the product specifications representative of the JM PVC/KEE membranes covered by this EPD.

Table 1: PVC/KEE membrane technical specifications.

PRODUCT	PRODUCT PROPERTIES	STANDARD	PRODUCT THICKNESS [MIL]	REFERENCE FLOW [KG/M ²]
JM PVC/KEE - 50 mil	Thermoplastic polyvinyl chloride membrane with Elvaloy® KEE (ketone ethylene ester) polymer	ASTM D 4434, Type III	50	1.63
JM PVC/KEE - 60 mil	Thermoplastic polyvinyl chloride membrane with Elvaloy® KEE (ketone ethylene ester) polymer	ASTM D 4434, Type III	60	1.81

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

JM PVC/KEE - 80 mil	Thermoplastic polyvinyl chloride membrane with Elvaloy® KEE (ketone ethylene ester) polymer	ASTM D 4434, Type III	80	2.49
------------------------	---	--------------------------	----	------

Product Specific/Average

This EPD is intended to represent product-specific PVC/KEE-based membranes. The production data used to develop this EPD considers the manufacturing activities during 2022 at two plants owned by Cooley/Group in Pawtucket, RI, and Lancaster, SC. A weighted average production from both facilities was taken into account where the contribution to overall average from each manufacturing site is proportional to its production volume.

Application

PVC/KEE-based single ply roofing membranes are widely used in various applications in building roofing systems due to their durability and performance. PVC/KEE-based roofing membranes are primarily used for flat and low-slope roofs in commercial structures, providing reliable waterproofing and weather resistance. Existing roofs can also be covered with PVC/KEE-based membranes during renovations, providing a new protective layer.

Declaration of Methodological Framework

This EPD is declared under a cradle-to-gate with options system boundary. The system boundary includes the cradle-to-gate stages (A1-A3) with options (A4-A5, C1-C4). More specifically, it encompasses all potential environmental impacts from raw materials extraction, processing, and transport to the manufacturing stage (A1-A3), transport to construction site and installation (A4-A5), and the end-of-life treatment of the product (C1-C4). At the end-of-life, it is assumed that 30% of the product is recycled and the remaining 70% is disposed in a landfill.

Technical Requirements

The technical specification below applies to the product considered in this EPD:

- ASTM D 4434, Type III – Standard Specification for PVC (Poly Vinyl Chloride) Type III

Properties of Declared Product as Delivered

PVC/KEE-based membranes are typically rolled and placed on wooden pallets. Packaging materials include cardboard and a plastic film to protect the membranes from damage during transportation. Once packaged, they are delivered to the customer.

Material Composition

Table 2 provides the average material content of a PVC/KEE-based single ply roofing membrane.

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

Table 2: Average PVC/KEE-based membrane material composition.

COMPONENT	CONTENT [% WEIGHT]
PVC + KEE resin	42.0%
UV stabilizer	0.1%
Flame retardant	0.7%
Titanium dioxide	4.0%
Fillers and additives	30.0%
Polyester scrim	9.4%
PVC roofing recycle	13.8%

Manufacturing

JM's PVC/KEE roofing membranes are manufactured off-site by Cooley/Group at two facilities located in Pawtucket, RI, and Lancaster, SC. The primary raw materials for this roofing membrane are PVC resin with Elvaloy® KEE (ketone ethylene ester) polymer. These raw materials are mixed with stabilizers, fire retardants, a pigment, filler and additives and pelletized at an off-site manufacturing unit and delivered to Cooley/Group.

The manufacturing processes involves several steps. First, the process begins with the preparation of yarn packages and beams, which are essential for creating the fabric base of the membrane. This step is followed by the knitting process. The yarn is knitted into fabric rolls, forming the structural base of the membrane. The knitted fabric rolls are cut to lengths for different membrane sizes. This process is followed by the profile procedures that includes back side extrusion of PVC layer, first calendaring, extrusion of face side, second calendaring, heating of the membrane in an annealing oven. The finished membrane is cut into rolls and inspected. Finally, the product is transferred onto large cardboard rolls and wrapped in plastic film to be shipped to building sites for installation. The final products are packaged using corrugated board, wrapped in plastic film and wooden pallet and shipped to JM's warehouses or installation sites.

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

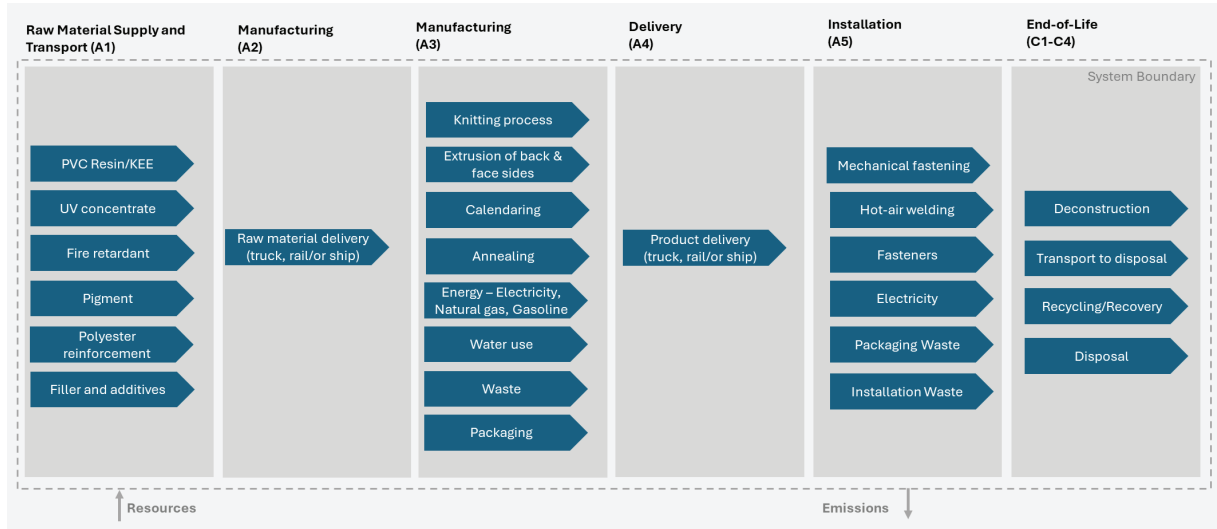


Figure 1: PVC/KEE-based roofing membrane production process schematic.

Packaging

The PVC/KEE-based membranes are bulk packaged using corrugated board and plastic film and delivered on wooden pallets.

Transportation

Primary data from Cooley/Group was used to account for the transportation distances and modes of transport for the supply of raw materials to the production facilities. CFFA's industry average EPD (CFFA, 2020) assumptions on the transport of the finished membrane roofing product to the construction site were considered in this EPD, as defined below:

- Manufacturing site to local distributor: 947 km (588 mi)
- Rail: 47 km (29 mi)
- Local distributor to building site: 25 km (16 mi)

For the transportation of the demolished product at end-of-life, a transport distance of 20 miles (32 km) by road truck from the demolition site to disposal sites is assumed in the study in accordance to CFFA's industry average EPD (CFFA, 2020) assumptions.

Product Installation

PVC/KEE-based roofing membranes are installed using mechanical fastening and hot-air welding. The membrane is secured with screws and seam plates, which are ensured to fasten through the membrane. Material and energy inputs for installation are based on the assumptions proposed by CFFA's Industry average EPD (CFFA, 2020). Therefore, in this study installation requirements per square meter of installed membrane are 0.111 kg of fasteners (screws and seam plates), 0.021 kWh of electricity for seam welding, and 0.015 kWh of electricity for securing screws. An effective

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

coverage of 10% was determined by JM as a representative installation metric and installation losses were set at 1%.

Waste discarded from bulk packaging materials at installation (e.g., corrugated cartons, polyethylene film, wooden pallets) is included in this module. Typical rates of waste processing routes in the US (e.g., landfill, incineration, recycling) are based on EPA statistics (EPA, 2022) and are assumed for the disposal of packaging materials discarded at installation.

Table 3: Installation systems for JM PVC/KEE roofing membrane.

DECLARED MEMBRANE	INSTALLATION	SEAM WELDING
50 mil	Mechanically fastened	Hot-air welding
60 mil		
80 mil		

Table 4: Installation data for 1 m² of installed JM PVC/KEE roofing membrane (50 mil, 60 mil, and 80 mil).

TYPE	UNIT	QUANTITY
Fasteners (5" type screws and seam plates)	kg	0.111
Electricity for seam welding	kWh	0.021
Electricity for securing the screws	kWh	0.015
Effective coverage	%	10
Material loss	%	1
Waste transport to landfill (packaging waste) – one way	mi/km	20/32

Use

The use stage is not part of the system boundary of the study.

Recycling and Disposal

The product end-of-life disposal assumptions are based on the ones proposed by CFFA's Industry average EPD (CFFA

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

, 2020). At end-of-life, deconstruction of PVC/KEE-based membranes require the use of electricity and diesel. The demolition waste is transported 20 miles (32 km) by truck to the landfill and waste processing site. A fraction of the demolition waste (30%) is sent for recycling, while the rest (70%) is disposed of in a landfill.

Table 5: C1 to C4 Modules, EOL scenario data for 1 m² of installed PVC/KEE roofing membrane (50,60 and 80 mil)

EOL STAGE	FLOW	UNITS	QUANTITY
C1	Electricity	kWh	0.0024
	Diesel	MJ	0.421
C2	Discarded PVC membrane	mi/km	20/32
C3	Secondary materials	%	30
C4	Disposal of waste	%	70

Life Cycle Assessment Background Information

Declared Unit

Per the Product Category Rules, the declared unit for this analysis is:

1 m² of installed single ply PVC/KEE roofing membrane for a stated product thickness.

System Boundary

Table 6 represents the system boundary and scope of the EPD.

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

Table 6: Description of the system boundary modules

PRODUCT STAGE			CONSTRUCTION PROCESS		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Raw material supply	Transport	Manufacturing	Transport from gate to site	Assembly/Install	Use	Maintenance	Repair	Replacement	Refurbishment	Building Operational Energy Use During Product Use	Building Operational Water Use During Product Use	Deconstruction	Transport	Waste processing	Disposal	Reuse, Recovery, Recycling Potential
X	X	X	X	X	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	MND

This study covers the life cycle of the products from cradle to gate with options (A1-A3, A4-A5, and C1-C4). Within these boundaries, the following stages were included as per Figure 2 below:

- **Raw materials acquisition:** Raw material supply (including virgin and recycled materials), inbound transport
- **Manufacturing:** Production of PVC/KEE roofing membrane, product packaging, manufacturing waste, releases to environment
- **Distribution:** Distribution of the PVC/KEE roofing membrane from the manufacturer to JM warehouses and to the building site for installation
- **End-of-Life:** Deconstruction, transport, recycling and final disposal site (landfill)



Figure 2: Life cycle stages included in system boundary.

Building operational energy and water use are considered to be outside of this study’s scope; any beneficial impact that the use of insulation may have on a building’s energy consumption is not calculated or incorporated into the analysis.

Estimates and Assumptions

The following assumptions were made on the manufacturing process.

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

Table 7: Key assumptions for manufacturing stage.

LIFE CYCLE STAGE	ASSUMPTION
A1	<p>Raw material supply</p> <ul style="list-style-type: none"> Proxy datasets used in some raw materials where no matching datasets or country-specific data were available (documentation in background report).
A3	<p>Manufacturing</p> <ul style="list-style-type: none"> PVC scrap inputs were considered free of upstream environmental burden; however, environmental impact of scrap processing was accounted for. PVC scrap outputs follow a cut off approach and therefore no environmental credits were assign to them. All processed water is discharged as wastewater in the municipal sewage; no losses via evaporation or other discharges were considered. Wood pallets for bulk packaging were assumed to be reused 20 times in their lifetime.

The analysis uses the following assumptions based on the CFFA’s industry average EPD (CFFA, 2020).

Table 8: Key assumptions at A4-C4 modules, per declared unit.

LIFE CYCLE STAGE	ASSUMPTION
A4	<p>Transport distances to installation site</p> <ul style="list-style-type: none"> Manufacturing site to local distributor: 947 km (588 mi) Rail: 47 km (29 mi) Local distributor to building site: 25 km (16 mi)
A5	<p>Installation</p> <ul style="list-style-type: none"> Mechanically fastened and hot-air welding Fasteners: 0.111 kg Electricity for seam welding: 0.021 kWh Electricity for securing screws: 0.015 kWh Effective coverage (from JM): 10% Losses (from JM): 1% Waste transport to disposal: 32 km (20 mi) by truck

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

C1	Deconstruction <ul style="list-style-type: none">Electricity: 0.0024 kWhDiesel: 0.421 MJ
C2	Transport distances of installation waste (CFFA's industry average EPD): <ul style="list-style-type: none">Truck: 32 km (20 mi)
C3	<ul style="list-style-type: none">Product's recycling at end-of-life: 30%Cut-off end-of-life allocation methodology applied (no credits for material/energy recovery)
C4	Product's disposal in the landfill at end-of-life: 70%

Cut-off Criteria

No cut-off criteria are defined for this study. The system boundary was defined based on relevance to the goal of the study. For the processes within the system boundary, all available energy and material flow data have been included in the model. In cases where no matching life cycle inventories are available to represent a flow, proxy data have been applied based on conservative assumptions regarding environmental impacts.

Data Sources

Since the plants manufacture membranes with different thicknesses from the same production line, it was not possible to distinguish the amount of raw materials used to manufacture a specific membrane thickness during the data collection period. In order to resolve this issue, data were collected as a plant totals and later allocated based on the overall production quantities of different products and thicknesses.

The LCA model was created using the LCA For Experts (LCA FE) software system for life cycle engineering, version 10.9 developed by Sphera (Sphera Solutions Inc., 2024). Background life cycle inventory data for raw materials and processes were obtained from the Managed LCA Content v. 2024.2 databases. Cooley/Group provided primary manufacturing data for the calendar year 2022.

Data Quality

As the majority of the relevant foreground data are measured data or calculated based on primary information sources of the owner of the technology, precision is considered to be high. Seasonal variations were balanced out by using annual production volume. All background data are sourced from Managed LCA Content databases with the documented precision. Each foreground process was checked for mass balance and completeness of the emission inventory. No data were knowingly omitted. Completeness of foreground unit process data is considered to be high. All background data are sourced from Managed LCA Content databases with the documented completeness.

Period under Review

Primary data collected represent production during the 2022 calendar year. This analysis is therefore intended to represent production primarily in 2022. All secondary data come from the Managed LCA Content database (v. 2024.2) and are representative of the years 2017-2023.

Allocation

Allocation is applied in the foreground system of the study. The PVC/KEE-based membranes covered in this study are produced at two facilities located in Pawtucket, RI, and Lancaster, SC. The facility in Pawtucket produces PVC only-based membranes (JM PVC SD Plus), PVC/KEE-based membranes (JM PVC/KEE), and PVC roofing accessories. The Lancaster facility produces only PVC only-based (JM PVC SD Plus) and PVC/KEE-based membranes (JM PVC/KEE). In order to apportion each roofing membrane product with a fraction of the total manufacturing input-output data collected in this study, a mass-based allocation approach is applied. That is, a share of the total manufacturing input-output data was allocated to each product that was proportional to its share of total production per site. Subsequently, a weighted average calculation was carried out with this allocated manufacturing data to obtain product-specific input-output sets of data that encompassed as weighting the production volumes from both manufacturing sites.

Allocation of background data (energy and materials) taken from the MLC v. 2024.2 databases is documented online at <https://lcadatabase.sphera.com/>

Comparability

Comparisons cannot be made between product-specific or industry average EPDs at the design stage of a project, before a building has been specified. Comparisons may be made between product-specific or industry average EPDs at the time of product purchase when product performance and specifications have been established and serve as a functional unit for comparison. Environmental impact results shall be converted to a functional unit basis before any comparison is attempted. Any comparison of EPDs shall be subject to the requirements of ISO 21930 or EN 15804. EPDs are not comparative assertions and are either not comparable or have limited comparability when they have different system boundaries, are based on different product category rules or are missing relevant environmental impacts. Such comparison can be inaccurate, and could lead to erroneous selection of materials or products which are higher-impact, at least in some impact categories.

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

Life Cycle Assessment Scenarios

Table 9: Transport to the building site (A4)

NAME	50 MIL	60 MIL	80 MIL	UNIT
Fuel type	Diesel	Diesel	Diesel	-
Fuel consumption	Truck: 0.048 Rail: 0.013	Truck: 0.048 Rail: 0.013	Truck: 0.048 Rail: 0.013	I/US ton*mi
Vehicle type	Truck LTL/dry van (EPA SmartWay) & Diesel cargo train	Truck LTL/dry van (EPA SmartWay) & Diesel cargo train	Truck LTL/dry van (EPA SmartWay) & Diesel cargo train	-
Transport distance	Manufacturing site to local distributor: 947 (588.4) Rail: 47 (29.2) Local distributor to building site: 25 (15.5)	Manufacturing site to local distributor: 947 (588.4) Rail: 47 (29.2) Local distributor to building site: 25 (15.5)	Manufacturing site to local distributor: 947 (588.4) Rail: 47 (29.2) Local distributor to building site: 25 (15.5)	km (mi)
Payload capacity	Truck: 22.6 Rail: 726.2	Truck: 22.6 Rail: 726.2	Truck: 22.6 Rail: 726.2	US ton
Gross density of products transported	1.86	2.08	2.84	kg/m ²
Weight of products transported (if gross density not reported)	-	-	-	kg
Volume of products transported (if gross density not reported)	-	-	-	m ³
Capacity utilization volume factor (factor: =1 or <1 or ≥ 1 for compressed or nested packaging products)	<1	<1	<1	-

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

Table 10: Installation into the building (A5)

NAME	50 MIL	60 MIL	80 MIL	UNIT
Ancillary materials	-	-	-	kg
Net freshwater consumption specified by water source and fate (amount evaporated, amount disposed to sewer)	-	-	-	m ³
Other resources: fasteners (screws and seam plates), per declared unit	0.111	0.111	0.111	kg
Electricity consumption, per declared unit	Electricity for seam welding: 0.021 Electricity for securing screws: 0.015	Electricity for seam welding: 0.021 Electricity for securing screws: 0.015	Electricity for seam welding: 0.021 Electricity for securing screws: 0.015	kWh
Other energy carriers, per declared unit	-	-	-	MJ
Product loss, per declared unit	1	1	1	%
Waste materials at the construction site before waste processing, generated by product installation, per declared unit	0.068	0.075	0.103	kg
Output materials resulting from on-site waste processing (specified by route; e.g. for recycling, energy recovery and/or disposal)	-	-	-	kg
Biogenic carbon contained in packaging	1.64	1.82	2.5	kg CO ₂
Direct emissions to ambient air, soil and water	-	-	-	kg
VOC content	-	-	-	µg/m ³

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

Table 11: End of life (C1-C4).

NAME		50 MIL	60 MIL	80 MIL	UNIT
Assumptions for scenario development (description of deconstruction, collection, recovery, disposal method and transportation), per declared unit		Electricity consumption at deconstruction: 0.0024 kWh	Electricity consumption at deconstruction: 0.0024 kWh	Electricity consumption at deconstruction: 0.0024 kWh	
		Diesel consumption at deconstruction: 0.421 MJ	Diesel consumption at deconstruction: 0.421 MJ	Diesel consumption at deconstruction: 0.421 MJ	
Collection process (specified by type)	Collected separately	-	-	-	kg/declared unit
	Collected with mixed construction waste	-	-	-	kg/declared unit
Recovery (specified by type)	Reuse	-	-	-	kg/declared unit
	Recycling	0.643	0.703	0.927	kg/declared unit
	Landfill	-	-	-	kg/declared unit
	Incineration	-	-	-	kg/declared unit
	Incineration with energy recovery	-	-	-	kg/declared unit
	Energy conversion efficiency rate	-	-	-	kg/declared unit
Disposal (specified by type)	Product or material for final deposition in landfill	1.261	1.399	1.923	kg/declared unit
Removals of biogenic carbon (excluding packaging)					kg CO ₂

Life Cycle Assessment and Inventory Results

These sections describe the potential impacts across the different life cycle stages of JM PVC/KEE roofing membrane. The overall results present the environmental impact indicators, resource use indicators, output flows, waste categories and carbon disposal and removal indicators in accordance with ISO 21920. The results cover the life cycle modules considered in the study: A1 to 3, A4, A5, and C1 to C4 modules.

The following results are based on a declared unit of 1 m² of installed JM PVC/KEE roofing membrane.

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

Life Cycle Impact Assessment Results

JM PVC/KEE - 50 mil

Table 12 to Table 15 shows the different environmental impact results of 1 m² of PVC/KEE for 50 mil thickness.

Table 12: LCIA impacts for 1 m² of JM PVC/KEE (50 mil).

PARAMETERS	UNITS	A1-A3	A4	A5	C1	C2	C3	C4
GWP 100 excl biogenic CO ₂	kg CO ₂ eq.	3.92E+00	1.89E-01	4.09E-01	4.43E-02	6.31E-03	0.00E+00	2.72E-02
ODP	kg CFC 11 eq.	1.44E-09	5.58E-16	5.15E-14	2.00E-16	1.86E-17	0.00E+00	1.31E-15
SFP	kg O ₃ eq.	1.68E-01	1.15E-02	1.66E-02	1.32E-02	3.33E-04	0.00E+00	2.53E-03
AP	kg SO ₂ eq.	2.60E-02	4.94E-04	2.23E-03	3.81E-04	1.47E-05	0.00E+00	1.41E-04
EP	kg P eq.	1.15E-03	5.34E-05	6.82E-05	2.92E-05	1.67E-06	0.00E+00	2.23E-04
ADP _r	MJ	9.72E+00	2.48E+00	4.74E+00	5.81E-01	8.28E-02	0.00E+00	4.01E-01

Table 13: Resource use for 1 m² of JM PVC/KEE (50 mil).

RESOURCE INDICATOR	UNIT	A1-A3	A4	A5	C1	C2	C3	C4
RPR _E	MJ	2.17E+01	1.11E-01	1.49E+00	2.88E-02	3.70E-03	0.00E+00	5.12E-02
RPR _M	MJ	9.79E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPR _E	MJ	6.10E+01	2.50E+00	5.21E+00	5.92E-01	8.36E-02	0.00E+00	4.13E-01
NRPR _M	kg	1.67E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
SM	MJ	1.74E-01	0.00E+00	8.52E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	-	-	-	-	-	-	-

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

NRSF	MJ	-	-	-	-	-	-	-
RE	m ³	-	-	-	-	-	-	-
FW	MJ	2.15E-02	3.68E-04	2.13E-03	9.01E-05	1.23E-05	0.00E+00	5.34E-05

Table 14: Output flows and waste for 1 m² of JM PVC/KEE (50 mil).

INDICATOR	UNITS	A1-A3	A4	A5	C1	C2	C3	C4
HWD	kg	-	-	-	-	-	-	-
NHWD	kg	1.92E-02	0.00E+00	2.16E-02	0.00E+00	0.00E+00	0.00E+00	1.26E+00
HLRW	kg	2.71E-06	8.93E-09	1.73E-07	4.78E-09	2.99E-10	0.00E+00	4.91E-09
ILLRW	kg	2.32E-03	7.53E-06	1.68E-04	4.01E-06	2.52E-07	0.00E+00	4.39E-06
CRU	kg	-	-	-	-	-	-	-
MFR	kg	8.10E-02	0.00E+00	1.48E-02	0.00E+00	0.00E+00	6.43E-01	0.00E+00
MER	kg	0.00E+00	0.00E+00	1.32E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EE	MJ	-	-	-	-	-	-	-

Table 15: Carbon disposal and removal for 1 m² of JM PVC/KEE (50 mil).

INDICATOR	UNITS	A1-A3	A4	A5	C1	C2	C3	C4
BCRP	kg CO ₂ eq.	-	-	-	-	-	-	-
BCEP	kg CO ₂ eq.	-	-	-	-	-	-	-
BCRK	kg CO ₂ eq.	1.08E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEK	kg CO ₂ eq.	0.00E+00	0.00E+00	1.07E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEW	kg CO ₂ eq.	-	-	-	-	-	-	-
CCE	kg CO ₂ eq.	-	-	-	-	-	-	-
CCR	kg CO ₂ eq.	-	-	-	-	-	-	-

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

CWNR	kg CO ₂ eq.	-	-	-	-	-	-	-
------	------------------------	---	---	---	---	---	---	---

JM PVC/KEE - 60 mil

Table 16 to Table 19 shows the different environmental impact results of 1 m² of JM PVC/KEE for 60 mil thickness.

Table 16: LCIA impacts for 1 m² of JM PVC/KEE (60 mil).

PARAMETERS	UNITS	A1-A3	A4	A5	C1	C2	C3	C4
GWP 100 excl biogenic CO ₂	kg CO ₂ eq.	4.35E+00	2.10E-01	4.09E-01	4.43E-02	6.97E-03	0.00E+00	3.02E-02
ODP	kg CFC 11 eq.	1.60E-09	6.19E-16	5.15E-14	2.00E-16	2.06E-17	0.00E+00	1.45E-15
SFP	kg O ₃ eq.	1.87E-01	1.28E-02	1.66E-02	1.32E-02	3.68E-04	0.00E+00	2.80E-03
AP	kg SO ₂ eq.	2.88E-02	5.48E-04	2.23E-03	3.81E-04	1.62E-05	0.00E+00	1.57E-04
EP	kg P eq.	1.28E-03	5.92E-05	6.87E-05	2.92E-05	1.84E-06	0.00E+00	2.48E-04
ADP _r	MJ	1.08E+01	2.75E+00	4.74E+00	5.81E-01	9.15E-02	0.00E+00	4.45E-01

Table 17: Resource use for 1 m² of JM PVC/KEE (60 mil).

RESOURCE INDICATOR	UNIT	A1-A3	A4	A5	C1	C2	C3	C4
RPR _E	MJ	2.41E+01	1.23E-01	1.49E+00	2.88E-02	4.08E-03	0.00E+00	5.68E-02
RPR _M	MJ	1.09E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPR _E	MJ	6.78E+01	2.78E+00	5.21E+00	5.92E-01	9.22E-02	0.00E+00	4.58E-01
NRPR _M	MJ	1.86E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
SM	kg	1.93E-01	0.00E+00	8.52E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	-	-	-	-	-	-	-
NRSF	MJ	-	-	-	-	-	-	-
RE	MJ	-	-	-	-	-	-	-

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

FW	m ³	2.39E-02	4.08E-04	2.13E-03	9.01E-05	1.36E-05	0.00E+00	5.92E-05
----	----------------	----------	----------	----------	----------	----------	----------	----------

Table 18: Output flows and waste for 1 m² of JM PVC/KEE (60 mil).

INDICATOR	UNITS	A1-A3	A4	A5	C1	C2	C3	C4
HWD	kg	-	-	-	-	-	-	-
NHWD	kg	2.13E-02	0.00E+00	2.40E-02	0.00E+00	0.00E+00	0.00E+00	1.40E+00
HLRW	kg	3.01E-06	9.92E-09	1.73E-07	4.78E-09	3.30E-10	0.00E+00	5.45E-09
ILLRW	kg	2.58E-03	8.36E-06	1.68E-04	4.01E-06	2.78E-07	0.00E+00	4.87E-06
CRU	kg	-	-	-	-	-	-	-
MFR	kg	8.99E-02	0.00E+00	1.63E-02	0.00E+00	0.00E+00	7.03E-01	0.00E+00
MER	kg	0.00E+00	0.00E+00	1.46E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EE	MJ	-	-	-	-	-	-	-

Table 19: Carbon disposal and removal for 1 m² of JM PVC/KEE (60 mil).

INDICATOR	UNITS	A1-A3	A4	A5	C1	C2	C3	C4
BCRP	kg CO ₂ eq.	-	-	-	-	-	-	-
BCEP	kg CO ₂ eq.	-	-	-	-	-	-	-
BCRK	kg CO ₂ eq.	1.20E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEK	kg CO ₂ eq.	0.00E+00	0.00E+00	1.18E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEW	kg CO ₂ eq.	-	-	-	-	-	-	-
CCE	kg CO ₂ eq.	-	-	-	-	-	-	-
CCR	kg CO ₂ eq.	-	-	-	-	-	-	-

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

CWNR	kg CO ₂ eq.	-	-	-	-	-	-	-
------	------------------------	---	---	---	---	---	---	---

JM PVC/KEE - 80 mil

Table 20 to Table 23 shows the different environmental impact results of 1 m² of JM PVC/KEE for 80 mil thickness.

Table 20: LCIA impacts for 1 m² of JM PVC/KEE (80 mil).

PARAMETERS	UNITS	A1-A3	A4	A5	C1	C2	C3	C4
GWP 100 excl biogenic CO ₂	kg CO ₂ eq.	5.99E+00	2.88E-01	4.11E-01	4.43E-02	9.45E-03	0.00E+00	4.15E-02
ODP	kg CFC 11 eq.	2.19E-09	8.52E-16	5.15E-14	2.00E-16	2.79E-17	0.00E+00	1.99E-15
SFP	kg O ₃ eq.	2.57E-01	1.76E-02	1.67E-02	1.32E-02	4.99E-04	0.00E+00	3.85E-03
AP	kg SO ₂ eq.	3.97E-02	7.54E-04	2.24E-03	3.81E-04	2.20E-05	0.00E+00	2.15E-04
EP	kg P eq.	1.75E-03	8.15E-05	7.07E-05	2.92E-05	2.50E-06	0.00E+00	3.41E-04
ADP _f	MJ	1.48E+01	3.79E+00	4.74E+00	5.81E-01	1.24E-01	0.00E+00	6.11E-01

Table 21: Resource use for 1 m² of JM PVC/KEE (80 mil).

RESOURCE INDICATOR	UNIT	A1-A3	A4	A5	C1	C2	C3	C4
RPR _E	MJ	3.32E+01	1.69E-01	1.49E+00	2.88E-02	5.53E-03	0.00E+00	7.81E-02
RPR _M	MJ	1.50E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPR _E	MJ	9.32E+01	3.82E+00	5.22E+00	5.92E-01	1.25E-01	0.00E+00	6.30E-01
NRPR _M	MJ	2.55E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
SM	kg	2.65E-01	0.00E+00	8.52E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	-	-	-	-	-	-	-
NRSF	MJ	-	-	-	-	-	-	-
RE	MJ	-	-	-	-	-	-	-

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

FW	m ³	3.29E-02	5.61E-04	2.13E-03	9.01E-05	1.84E-05	0.00E+00	8.14E-05
----	----------------	----------	----------	----------	----------	----------	----------	----------

Table 22: Output flows and waste for 1 m² of JM PVC/KEE (80 mil).

INDICATOR	UNITS	A1-A3	A4	A5	C1	C2	C3	C4
HWD	kg	-	-	-	-	-	-	-
NHWD	kg	2.93E-02	0.00E+00	3.30E-02	0.00E+00	0.00E+00	0.00E+00	1.92E+00
HLRW	kg	4.15E-06	1.36E-08	1.73E-07	4.78E-09	4.47E-10	0.00E+00	7.49E-09
ILLRW	kg	3.55E-03	1.15E-05	1.68E-04	4.01E-06	3.77E-07	0.00E+00	6.69E-06
CRU	kg	-	-	-	-	-	-	-
MFR	kg	1.24E-01	0.00E+00	2.26E-02	0.00E+00	0.00E+00	9.27E-01	0.00E+00
MER	kg	0.00E+00	0.00E+00	2.01E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EE	MJ	-	-	-	-	-	-	-

Table 23: Carbon disposal and removal for 1 m² of JM PVC/KEE (80 mil).

INDICATOR	UNITS	A1-A3	A4	A5	C1	C2	C3	C4
BCRP	kg CO ₂ eq.	-	-	-	-	-	-	-
BCEP	kg CO ₂ eq.	-	-	-	-	-	-	-
BCRK	kg CO ₂ eq.	1.65E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEK	kg CO ₂ eq.	0.00E+00	0.00E+00	1.63E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEW	kg CO ₂ eq.	-	-	-	-	-	-	-
CCE	kg CO ₂ eq.	-	-	-	-	-	-	-
CCR	kg CO ₂ eq.	-	-	-	-	-	-	-

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

CWNR	kg CO ₂ eq.	-	-	-	-	-	-	-
------	------------------------	---	---	---	---	---	---	---

LCA Interpretation

The present EPD evaluates JM’s PVC/KEE single ply roofing membrane’s potential environmental impacts, which is sold by JM in thicknesses of 50 mil, 60 mil, and 80 mil. The 80-mil thickness JM PVC/KEE membrane has the highest GWP100 impact, excluding biogenic carbon, 6.78 kg CO₂e/m² of membrane. The 60-mil and 50-mil thicknesses membranes have GWP100 of 5.05 kg CO₂e and 4.6 kg CO₂e per m² of membrane, respectively. The PVC/KEE-based membranes have a GWP100 that is 22% lower than its PVC-only counterparts, explained by different energy consumption patterns between manufacturing sites (i.e., the plant producing most of the PVC-only membrane utilizes larger extruders with an increased electricity consumption). The contribution analysis shows that the environmental burden is mostly driven by the raw material supply (A1, 75%, 76%, 78% contribution to GWP100 for 50, 60, and 80 mil, respectively), which in turn is dominated by the production of the base resin (38%, 39%, 40%), the plasticizer (10% across thicknesses), and other raw materials (25%, 25%, 26%). Electricity consumption is a key contributor to manufacturing (A3) GWP100 impacts (4% for all thicknesses). Electricity use at installation (A5, 13%, 12%, 10%) also contributes to the GWP100. For the rest of the impact categories, modules A1-A3 also sum up more than 85% contribution.

Additional Environmental Information

Environment and Health During Manufacturing

Johns Manville roofing membrane products are designed, manufactured and tested in our own facilities, which are certified and registered to the stringent ISO 9001 (ANSI/ASQC 90) and ISO 14001 quality and environmental standards. These certifications, along with regular, independent third-party auditing for compliance, is your assurance that JM products deliver consistent high quality.

Environment and Health During Installation

More details on installation is available at <https://www.jm.com/en/commercial-roofing/PVC-design-and-installation-considerations/>.

Building Use Stage Benefits

The lighter-colored JM PVC reflects solar energy to lower the amount of heat absorbed into the building, greatly reducing air-conditioning energy loads and costs.

White JM PVC membrane meets the stringent requirements for both LEED® (Leadership in Energy and Environmental Design) and California Title 24 when tested by the CRRC® (Cool Roof Rating Council).

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

References

- ISO. (2006). ISO 14025: Environmental labels and declarations - Type III environmental declarations - Principles and procedures. Geneva: International Organization for Standardization.
- ISO. (2017). ISO 21930: Sustainability in buildings and civil engineering works -- Core rules for environmental product declarations of construction products and services. Geneva: International Organization for Standardization.
- ISO. (2020a). ISO 14040/Amd.1:2020: Environmental management – Life cycle assessment – Principles and framework. Geneva: International Organization for Standardization.
- ISO. (2020b). ISO 14044:2006/Amd.1:2017/Amd.2:2020 Environmental management – Life cycle assessment – Requirements and guidelines. Geneva: International Organization for Standardization.
- NSF International. (2019). Product Category Rule for Preparing an Environmental Product Declaration for Single Ply Roofing Membranes, v2.
- CFFA . (2020). *An Environmental Product Declaration for Single-ply Polyester for Reinforced PVC Roofing Membrane*,. West Conshohocken, PA: Chemical Fabrics & Film Association Inc. and ASTM International.
- EPA. (2022). *EPA National Overview: Facts and Figures on Materials, Wastes and Recycling*.
<https://www.epa.gov/facts-and-figures-about-materials-waste-and-recycling/national-overview-facts-and-figures-materials#recycling>.
- Sphera Solutions Inc. (2024). *LCA Database Documentation*. Retrieved from Sphera Solutions, Inc. Retrieved from <https://sphera.com/solutions/product-stewardship/life-cycle-assessment-software-and-data/managed-lca-content>

ENVIRONMENTAL PRODUCT DECLARATION



JM PVC/KEE SINGLE PLY ROOFING MEMBRANE
50 MIL, 60 MIL, AND 80 MIL

According to ISO 14025 and ISO 21930:2017

Contact Information

Study Commissioner



Johns Manville
717 17th St.
Denver, CO 80202
800-654-3103
www.jm.com

LCA Practitioner



Sphera Solutions, Inc.
130 E Randolph St, #2900
Chicago, IL 60601
<https://sphera.com/contact-us/>
www.sphera.com

The Right Resources Include Nationwide Distribution

We have strategically placed our distribution and manufacturing facilities across the nation to ensure that materials reach your destination on time.

We have numerous locations coast to coast, so you can be confident that our quality products will ship right to your job site.





717 17th St.
Denver, CO 80202
(800) 922-5922
www.jm.com/roofing