

Features and Components

The High Load Fastener is a blue, corrosion-resistant #15 fastener with a #3 Phillips head, and a drill point designed for quick installation in new or re-roof applications.

The High Load LH Fastener is a Grey, #15 fastener with a larger #3 Phillips head, and a drill point designed for quick installation in new or re-roof applications.

Use: Membranes

Material: Carbon Steel


Gauge: #15

Head: #3 Phillips head

Colors: High Load Fastener - Blue
High Load LH Fastener - Grey

Deck Type: Wood or 18 - 24 gauge (1.25 mm - 0.56 mm) Steel

Coating: CR-10 corrosion resistant factory applied coating passes the corrosion requirements of FM 4470 and ETAG 006

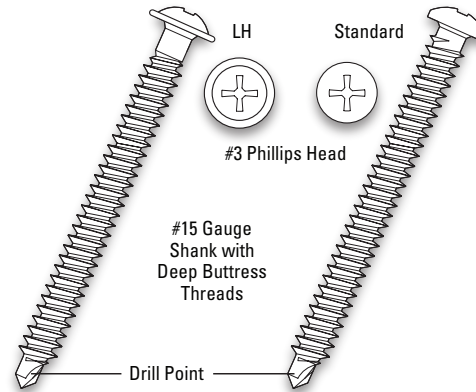


Component



Type



Multi-Ply
Single Ply



System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP			SBS				
	HA	CA	CA	HW	HA	CA	HW	SA	MF	
Compatible with the selected Multi-Ply systems above										

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Compatible with the selected Single Ply systems above										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

Recycled Content	This steel based product contains a minimum of 25% post consumer recycled materials by weight
------------------	---

Peak Advantage® Guarantee Information

Systems	Approved to use with any Peak Advantage Guarantee
---------	---

Codes and Approvals*



*Fastener approvals are based on system approvals

Installation/Application

Steel deck: minimum 3/4" penetration

Wood deck: minimum 1" penetration

Packaging and Dimensions

Standard Fastener Sizes	Quantity per Container*
1 1/4", 2" to 5" (3.2 cm, 5.1 to 12.7 cm)	1,000/pail
6" to 14" (15.2 to 35.6 cm)	500/pail or ≥ 8" 500/box
16" to 20" (40.6 to 50.8 cm)	250/box
22" (55.9 cm) and 24" (61 cm)	125/box
LH Fastener Sizes	
1 1/4", 2" to 4" (3.2 cm, 5.1 to 10.2 cm)	1,000/pail
5" to 8", 10", 12" (12.7 to 20.3 cm, 25.4 cm, 30.5 cm)	500/pail
Producing Locations**	Agawam, MA and Itasca, IL

* A bit is provided in each pail.

**The point of manufacture for fasteners varies depending on the specific part. Call your local JM sales professional for assistance.